



Sacramento Metropolitan Fire District

Approved Door Hardware

10545 Armstrong Ave., Suite 310 • Mather, CA 95655 • Phone (916) 859-4330 • Fax (916) 859-3717

APPROVED DOOR HARDWARE

Self-Releasing Door Hardware

The lever is locked and unlocked by a key from the exterior. The inside lever is always unlocked and provides single action exiting when the interior lever is turned.



Self-Releasing Door Hardware with Code Entry

Door is locked from the exterior side at all times (code is required for access). The inside lever is always unlocked and provides single action exiting when the interior lever is turned.



Self-Releasing Door Hardware with Interconnected Single Locking Hardware

Single deadbolt protection with single action exiting when the interior lever is turned. Deadbolt retracts when the interior lever is turned.



Self-Releasing Door Hardware with Interconnected Multi-Point Locking Hardware

Multi-point deadbolt protection with single action exiting when panic bar is depressed. Multi-point locking hardware is also available with lever type handle.



California Fire Code Locks and latches 1010.1.9.3(2) & 1010.1.9.3(2.1 - 2.3)

In buildings in occupancy Group A having an occupant load of **300 or less**, Groups B, F, M and S, and in places of religious worship, the **main** exterior door or doors are permitted to be equipped with key-operated locking devices from the egress side provided: The locking device is readily distinguishable as locked; and a readily visible durable sign is posted on the egress side on or adjacent to the door stating: **“THIS DOOR TO REMAIN UNLOCKED DURING BUSINESS HOURS”** or **“THIS DOOR TO REMAIN UNLOCKED WHEN BUILDING IS OCCUPIED”**. The use of the key-operated locking device is revocable by the fire code official for due cause.




Visible Sign
Posted on Door

Double Keyed
Cylinder Deadbolt

DOUBLE KEYED CYLINDER DEADBOLT

A double keyed cylinder deadbolt requiring a key to unlock the door from the outside and inside. This type of deadbolt is approved on the **main** entrance door in occupancy Group A having an occupant load of **300 or less**, and in Groups B, F, M and S as long as a readily visible durable sign is posted on the inside on or adjacent to the door stating: **“THIS DOOR TO REMAIN UNLOCKED DURING BUSINESS HOURS”** or **“THIS DOOR TO REMAIN UNLOCKED WHEN BUILDING IS OCCUPIED”**.

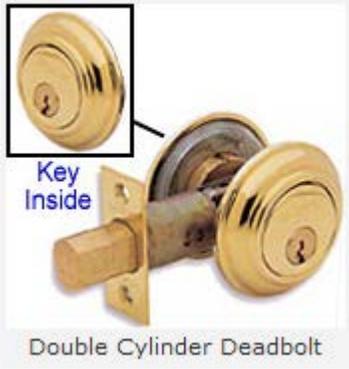

PERMITTED

SINGLE KEYED CYLINDER DEADBOLT (THUMB-TURN DEADBOLT)

The most common deadbolt in use is the single keyed deadbolt where a key is required to unlock the door from the outside but a simple thumb-turn is used to unlock the door from the inside. This installation is **Not** allowed on any door unless it is a component of interconnected single action hardware.



NOT PERMITTED
Unless it is a component of interconnected single action hardware